


# Zunt PN Service Joints

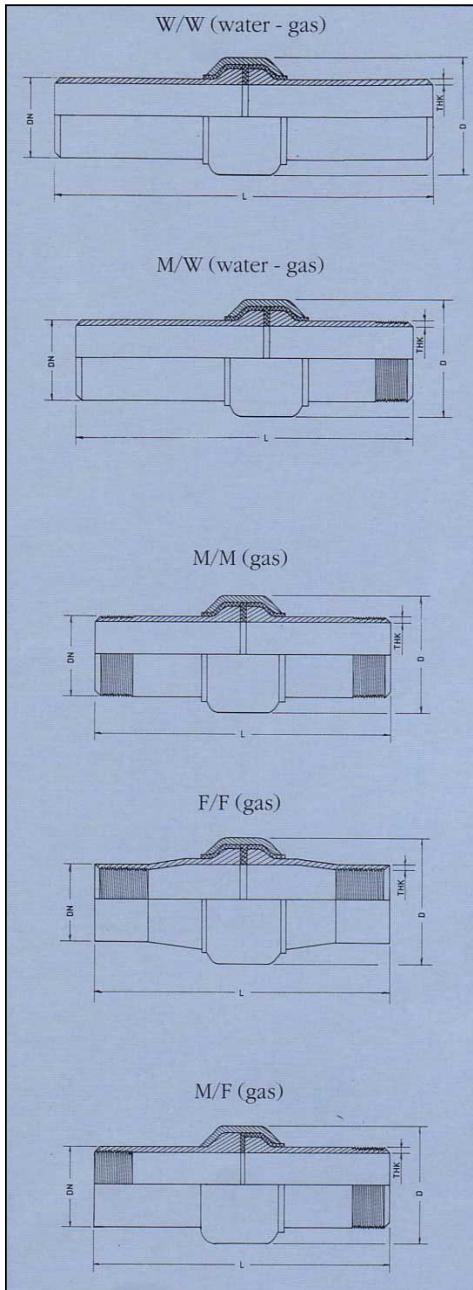

NPS	THK	D	L	Weight
INCH	mm	mm	mm	Kg
1/2	2.77	48	210	0.55
3/4	2.87	49	220	0.55
1	3.38	54	230	0.60
1 1/4	3.56	64	250	1.20
1 1/2	3.68	71	260	1.40
2	3.68	83	290	1.90
2 1/2	4.50	101	330	2.90
3	4.78	115	350	3.38

NPS	THK	D	L	Weight	
INCH	t	tl	mm	mm	Kg
1/2	3.2	2.77	48	150	0.50
3/4	3.2	2.87	49	165	0.50
1	4.0	3.38	54	180	0.65
1 1/4	4.0	3.60	64	195	1.00
1 1/2	4.0	3.70	71	210	1.20
2	4.5	3.70	83	220	1.60
2 1/2	4.5	4.50	101	240	2.30
3	4.78	4.78	115	260	3.50

NPS	THK	D	L	Weight
INCH	mm	mm	mm	Kg
1/2	2.77	48	100	0.40
3/4	2.87	49	110	0.40
1	4.00	54	120	0.50
1 1/4	4.00	64	135	0.70
1 1/2	4.00	71	145	0.90
2	4.50	83	150	1.25
2 1/2	4.50	101	176	1.55
3	4.78	115	200	2.30

NPS	THK	D	L	Weight
INCH	mm	mm	mm	Kg
1/2	2.77	48	100	0.40
3/4	2.87	49	110	0.40
1	4.00	54	120	0.70
1 1/4	4.00	64	135	0.90
1 1/2	4.00	71	145	1.10
2	4.50	83	150	1.80

NPS	THK	D	L	Weight
INCH	t	mm	mm	Kg
1/2	3.20	48	100	0.30
3/4	3.20	49	110	0.40
1	4.00	54	120	0.50
1 1/4	4.00	64	135	0.65
1 1/2	4.00	71	145	0.90
2	4.50	83	150	1.20
2 1/2	4.50	101	170	1.60
3	4.78	115	200	2.20



### Characteristic guaranteed for standard joints

- Max operating pressure 10 bar
- Pneumatic leakage test 5 bar.
- Operating temperature -10°C to +70°C

### Electrical tests

In dry air at 25°C

- Dielectric strength test: 2500 V at 50 Hz a.c. for 1 min.
- Electrical resistance test: ≥5 MΩ - 1000 V d.c
- Internal lining: oven-cured epoxy powder (70 DFT)
- External coating: epoxy phenolic paint

Please see your local Savcor Products office for custom designed insulating and service joint requirements.

Vic/Tas/SA 03 9993 7500	NSW 02 9663 2322	NZ 09 414 5080	QLD/NT 07 3890 8533	WA 08 9248 8999
----------------------------	---------------------	-------------------	------------------------	--------------------

All written data and statements herein are provided in good faith and believed to be reliable and appropriate at the time of drafting this document. However it is given without implied or express guarantee. Potential uses are urged to trial and /or conduct conformity test of the product to deem its suitable in application for a particular end use prior to purchase.